

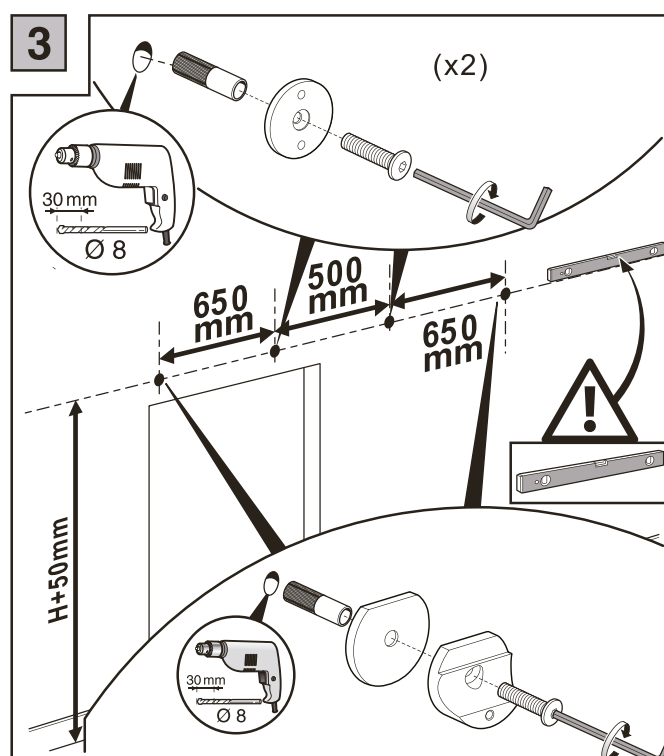
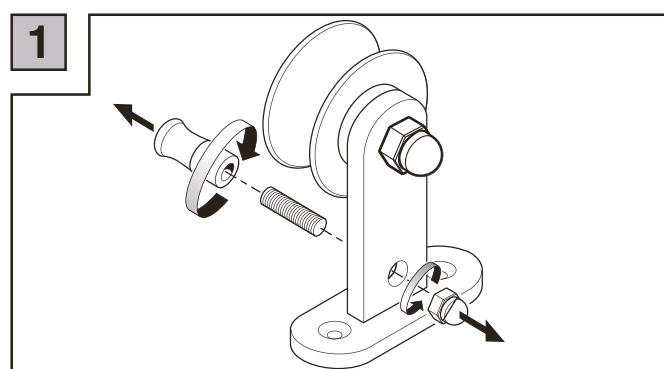
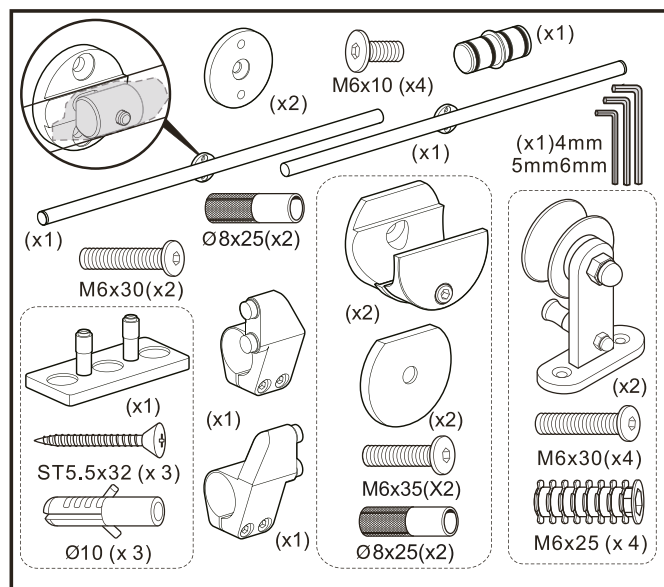
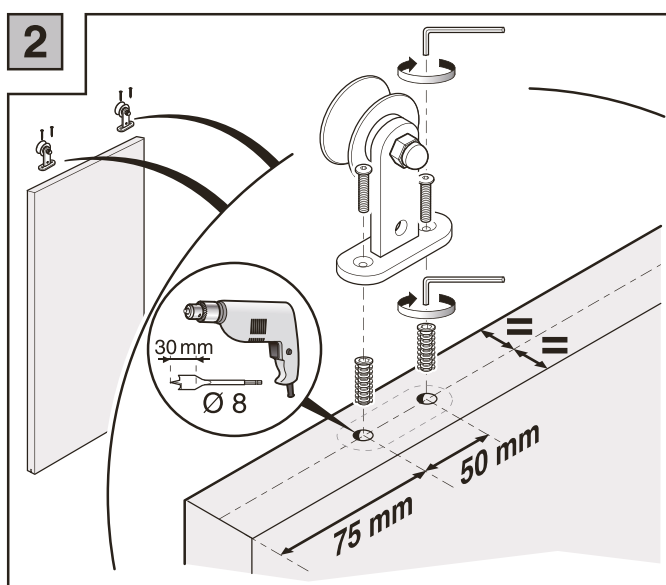
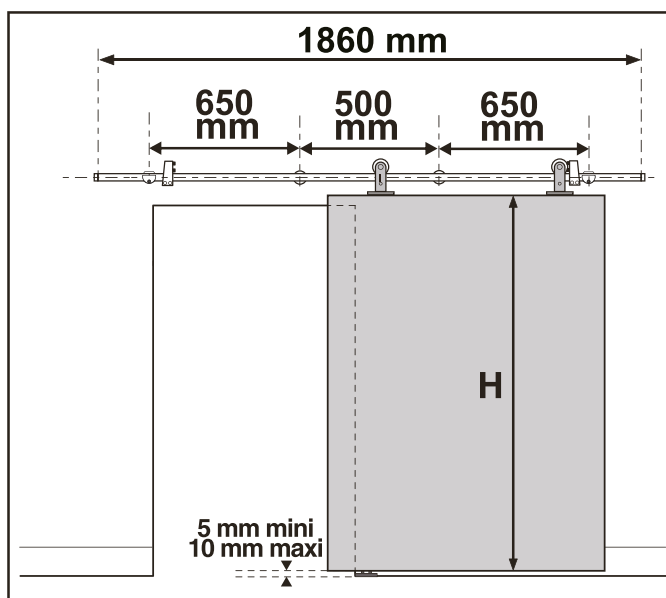
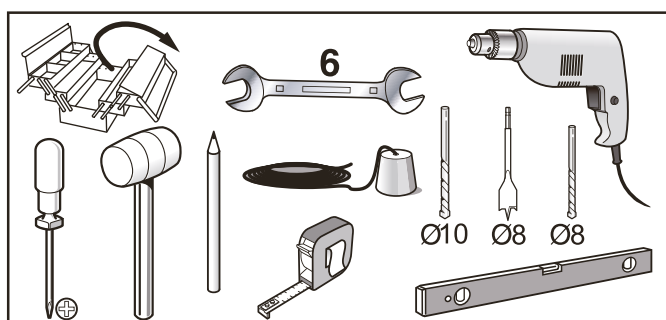
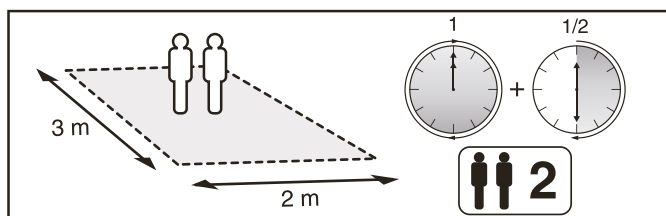
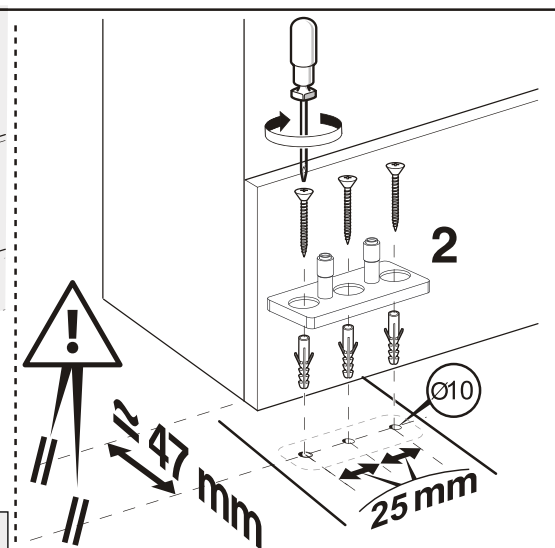
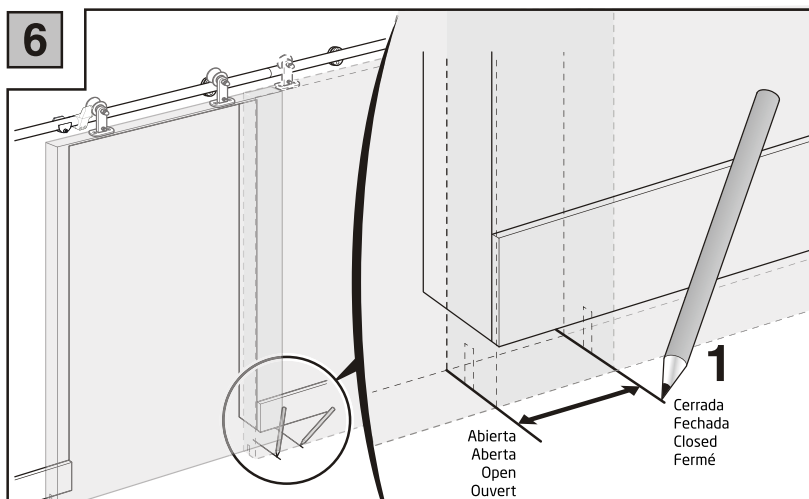


VC7442 KIT PORTAS DE CORRER

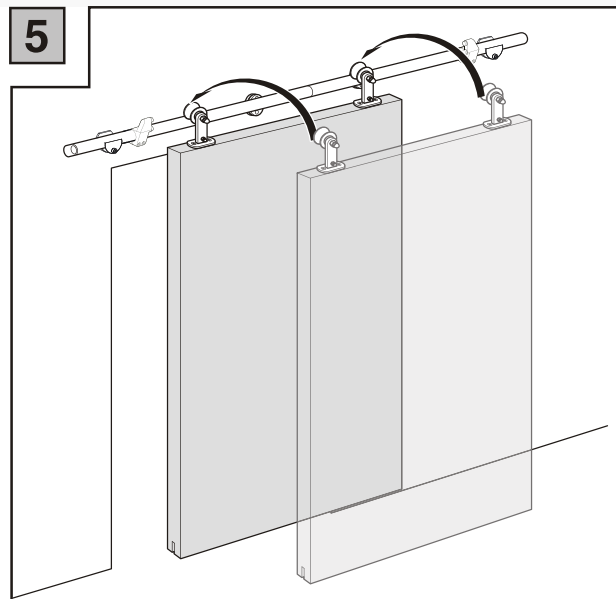

Espacio entre la puerta en posición abierta y cerrada, de mínimo 15 mm, sin embargo, se recomiendan 40 mm.
Espaço entre a porta em posição aberta e fechada, de no mínimo 15 mm, porém, são recomendados 40 mm.
Gap between the door in the open and closed position, with a minimum of 15 mm, however, 40 mm is recommended.
Espace entre porte en position ouverte et en position fermée, de 15 mm minimum, cependant 40 mm sont conseillés

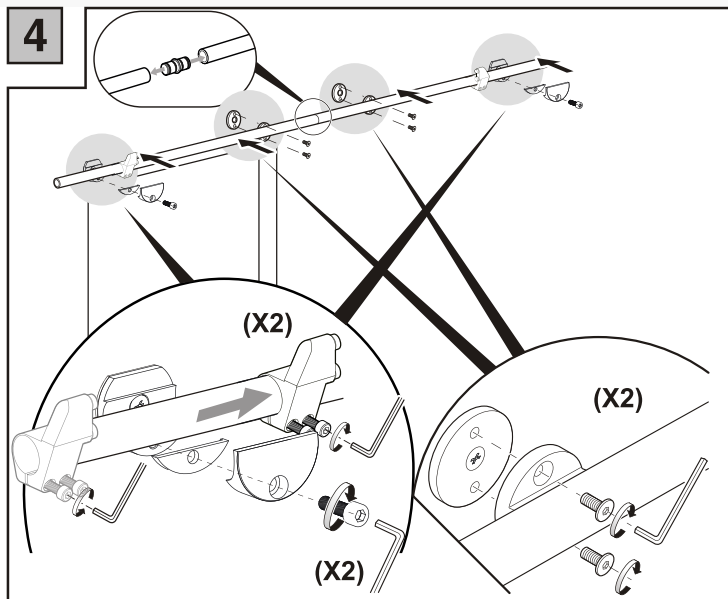